



AFFINIUM®LED SLIMBRIGHT 200

More robust, but as flexible as the succesfull 100-series. More light, less powerconsuming. Easy in length adjustable* just by cutting it and making it back to IP66 with our gelcaps. To be used in illuminated signing as well as in architectural projects. Easy to install with our extreme adhesive tape and or mountingstrips. Can be used with current Philips powerdriver. (* not in any length)

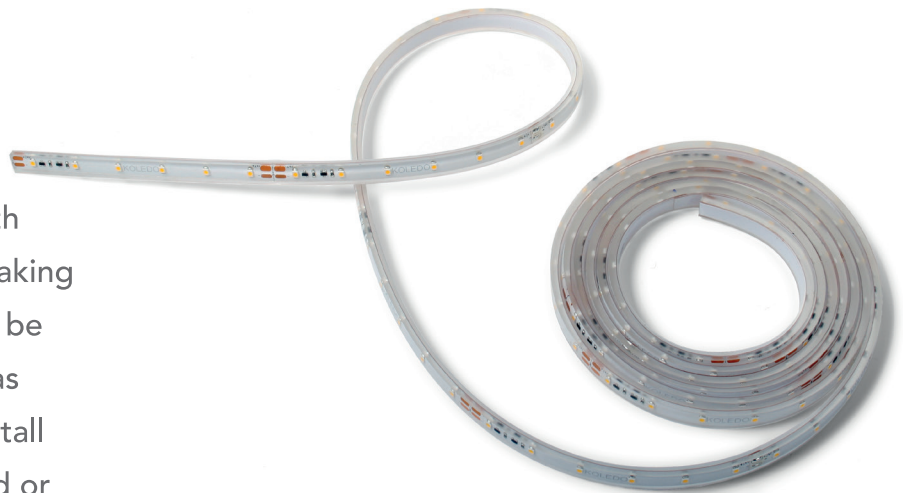

KOLEDO
PROFESSIONAL LED SOLUTIONS

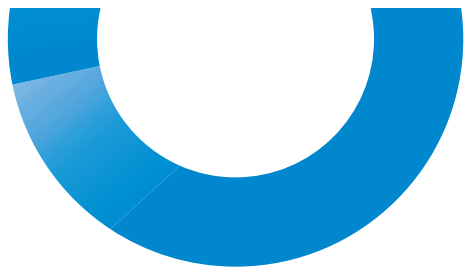

AFFINIUM®LED


SLIMBRIGHT 200

SPECIFICATIONS

PRODUCT	COLOR TEMP.	LUMEN OUTPUT	LEDS/PITCH	POWER	INGRESS PROTECTION	CASETEMP @30°C	CRI	AMBIENT TEMP.RANGE
	K	Lm/mtr	pcs/mm	W/mtr	IP	°C		°C
Affinium® SB200 series Coolwhite 24V	6300 +/-150	235	48/20	2,4	66	45	75	-20/55
Affinium® SB200 series Warm White 24V	3000 +/-150	212	48/20	2,4	66	45	80	-20/55
Affinium® SB200 series RGB 24V			36/28	5,5	66	45		-20/55

DIMENSIONS (MM)

	A1	A2	B1	C1	# LED'S
	mm	mm	mm	mm	
Single colors	520	500	10,2	5,4	24
Single colors	1020	1000	10,2	5,4	48
Single colors	5020	5000	10,2	5,4	240
RGB	520	500	12,6	5,4	18
RGB	1030	1000	12,6	5,4	36
RGB	5020	5000	12,6	5,4	180

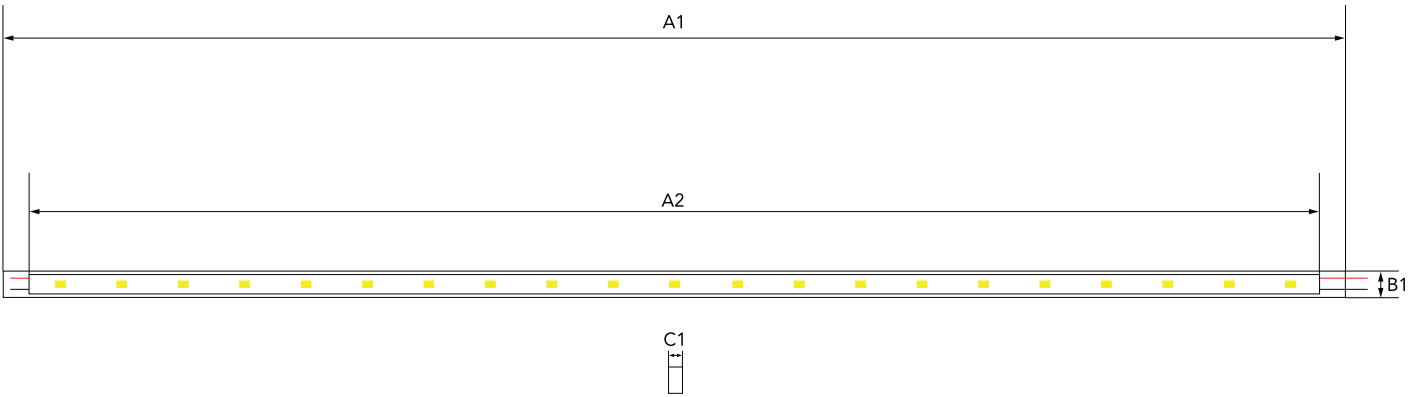

EXAMPLES

- cabinet lighting
- kick boards
- bar lighting
- counter lighting
- signage and sign lighting
- outdoor cove lighting
- architectural lighting
- task lighting



All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication there of does not convey nor imply any license under patent- or other industrial or intellectual property rights.

KOLEDO

PROFESSIONAL LED SOLUTIONS

KOLEDO.EU • EKKERSRIJT 7051 • 5692 HB SON
THE NETHERLANDS • +31 40 23 50 112
DEVELOPED AND MANUFACTURED USING PHILIPS TECHNOLOGY