

AMBIUM® SLIMBRIGHT 300-COL PREMIUM

Constantly improving light output and the quality of light. The Slimbright 300 is extremely robust and flexible. Guaranteed uniform color bin and lighting. This Slimbright is adjustable in length and very easy to install with tape or mounting clips to suit all your lighting designs and applications.



AMBIUM® SLIMBRIGHT-COL PREMIUM




SPECIFICATIONS



ARTICLE NUMBER	PRODUCT	WAVE-LENGTH	POWER	EFFI-CIENCY	VOLT-AGE	LEDS / METER	IP RATING	TEMP
		nm	W/m	Lm/W	V			°C
KSB3PC0A0012	SlimBright 300-COL Amber 1000mm	890	9.6	93	24	56	67	-20 to 60
KSB3PC0B0012	SlimBright 300-COL Blue 1000mm	302	6.7	45	24	56	67	-20 to 60
KSB3PC0G0012	SlimBright 300-COL Green 1000mm	740	7.2	103	24	56	67	-20 to 60
KSB3PC0A0052	SlimBright 300-COL Red 1000mm	348	9.1	39	24	56	67	-20 to 60
KSB3PC0R0012	SlimBright 300-COL Amber 5000mm	890	9.6	93	24	56	67	-20 to 60
KSB3PC0B0052	SlimBright 300-COL Blue 5000mm	302	6.7	45	24	56	67	-20 to 60
KSB3PC0G0052	SlimBright 300-COL Green 5000mm	740	7.2	103	24	56	67	-20 to 60
KSB3PC0R0052	SlimBright 300-COL Red 5000mm	348	9.1	39	24	56	67	-20 to 60

* Lumen values are typical. Allow +/- 10% for color binning tolerance.

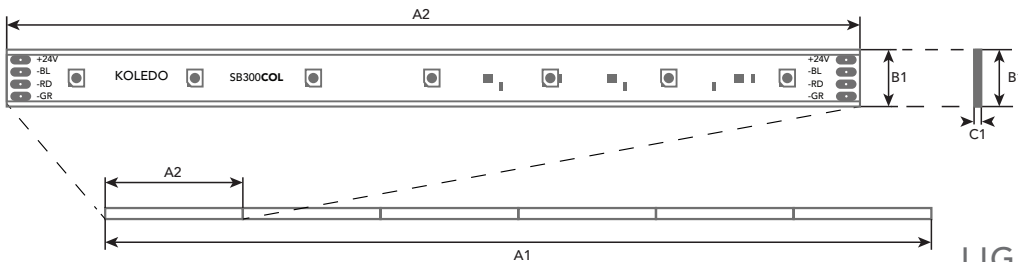

DIMENSIONS (MM)

PRODUCT	A1	A2	B1	C1
	mm	mm	mm	mm
Slimbright 300-COL 1000mm	1040	166	13	6
Slimbright 300-COL 5000mm	5040	166	13	6

LIGHT DIAGRAM

