



PRIVIUM® POSTERBOX CONSTANT CURRENT




SPECIFICATIONS



| ARTICLE NUMBER | PRODUCT | COLOR TEMP | LUMEN OUTPUT | POWER | EFFICIENCY | CRI | VOLT-AGE | # LEDES | IP RATING | TEMP |
|----------------|-------------------------------|------------|--------------|-------|------------|-----|----------|---------|-----------|-----------|
| | | K | lm* | W | lm/W | | V | L/M* | | °C |
| K929600213 | Privium Posterbox 402-CC 827* | 2700 | 2010 | 21 | 96 | 80+ | 36 | 2 | 66 | -20 to 60 |
| K929600413 | Privium Posterbox 402-CC 840* | 4000 | 2040 | 21 | 97 | 80+ | 36 | 2 | 66 | -20 to 60 |
| K929483013 | Privium Posterbox 402-CC 857* | 5700 | 2040 | 21 | 97 | 70+ | 36 | 2 | 66 | -20 to 60 |
| K929483313 | Privium Posterbox 402-CC 865* | 6500 | 2190 | 21 | 104 | 80+ | 36 | 2 | 66 | -20 to 60 |
| KPBO210427 | Privium Posterbox 454-CC 827* | 2700 | 816 | 10.5 | 78 | 80+ | 36 | 4 | 66 | -20 to 60 |
| KPBO210440 | Privium Posterbox 454-CC 840* | 4000 | 1008 | 10.5 | 96 | 80+ | 36 | 4 | 66 | -20 to 60 |
| KPBO210465 | Privium Posterbox 454-CC 865* | 6500 | 1194 | 10.5 | 114 | 70+ | 36 | 4 | 66 | -20 to 60 |

* One Posterbox 402-CC string is 6 modules long.
 LM* LM are measured at 1 meter above the module. Lumen values are typical. Allow +/- 10% for color binning tolerance.
 The Affinium Posterbox Outdoor is intended for built-in outdoor & indoor use only.
 The Posterbox should not be directly exposed to the elements like snow, water and ice.
 L/M* Leds per module.

SCHEMATIC

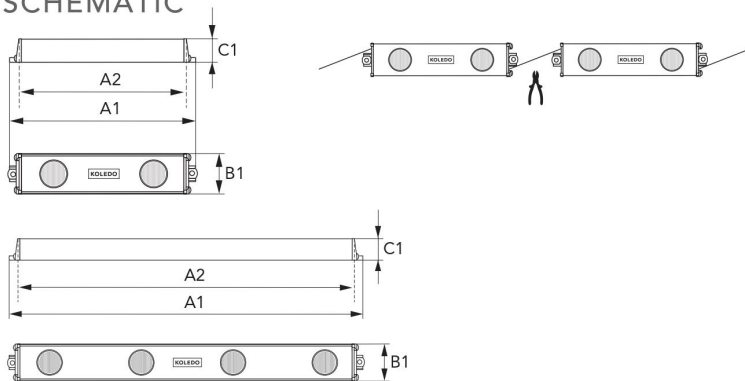

DIMENSIONS (MM)

| PRODUCT | A1 | A2 | B1 | C1 | # LEDES |
|--------------------------|-----|-----|------|----|---------|
| | mm | mm | mm | mm | |
| Privium Posterbox 402-CC | 180 | 155 | 37.5 | 16 | 2 |
| Privium Posterbox 454-CC | 371 | 351 | 37.5 | 16 | 4 |

LIGHT DIAGRAM

