

KOLEDO

PROFESSIONAL LED SOLUTIONS



PRIVIUM® POSTERBOX SERIES

The Posterbox 460 series sets new standards for high quality rectangular box signs or box displays. The PRIVIUM Posterbox 460 Outdoor is fully weatherproof. All outdoor Posterbox modules have an IP66 and IP67 rating, which ensures high reliability. Koledo Posterbox 460 series lights up instantly, even at temperatures as low as -20°C.

PRIVIUM®

POSTERBOX

CONSTANT VOLTAGE




SPECIFICATIONS



ARTICLE NUMBER	PRODUCT	COLOR TEMP	LUMEN OUTPUT	POWER	EFFICIENCY	CRI	VOLT. AGE	# LEDS	IP RATING	TEMP
		K	lm*	W	lm/W		V			°C
KPBO246427	Privium Posterbox LPM464 827	2700	816	10.5	78	80+	24	4	66	-20 to 60
KPBO246440	Privium Posterbox LPM464 840	4000	1008	10.5	96	80+	24	4	66	-20 to 60
KPBO246465	Privium Posterbox LPM464 865	6500	1194	10.5	115	70+	24	4	66	-20 to 60
KPBO246627	Privium Posterbox LPM466 827	2700	1224	15.6	78	80+	24	6	66	-20 to 60
KPBO246640	Privium Posterbox LPM466 840	4000	1497	15.6	96	80+	24	6	66	-20 to 60
KPBO246665	Privium Posterbox LPM466 865	6500	1788	15.6	115	70+	24	6	66	-20 to 60
KPBO201027	Privium Posterbox LPM460 827	2700	2035	26.1	78	80+	24	10	66	-20 to 60
KPBO201040	Privium Posterbox LPM460 840	4000	2505	26.1	96	80+	24	10	66	-20 to 60
KPBO201065	Privium Posterbox LPM460 865	6500	3001	26.1	115	70+	24	10	66	-20 to 60
KPBI246427	Privium Posterbox LPM464i 827	2700	816	10.5	78	80+	24	4	21	-20 to 60
KPBI246440	Privium Posterbox LPM464i 840	4000	1008	10.5	96	80+	24	4	21	-20 to 60
KPBI246465	Privium Posterbox LPM464i 865	6500	1194	10.5	115	70+	24	4	21	-20 to 60
KPBI246627	Privium Posterbox LPM466i 827	2700	1224	15.6	78	80+	24	6	21	-20 to 60
KPBI246640	Privium Posterbox LPM466i 840	4000	1497	15.6	96	80+	24	6	21	-20 to 60
KPBI246665	Privium Posterbox LPM466i 865	6500	1788	15.6	115	70+	24	6	21	-20 to 60

* Lm are measured at 1 meter above the module. Lumen values are typical. Allow +/- 10% for color binning tolerance. The Privium Posterbox Outdoor is intended for built-in outdoor & indoor use only. The Posterbox should not be directly exposed to the elements like snow, water and ice.

SCHEMATIC

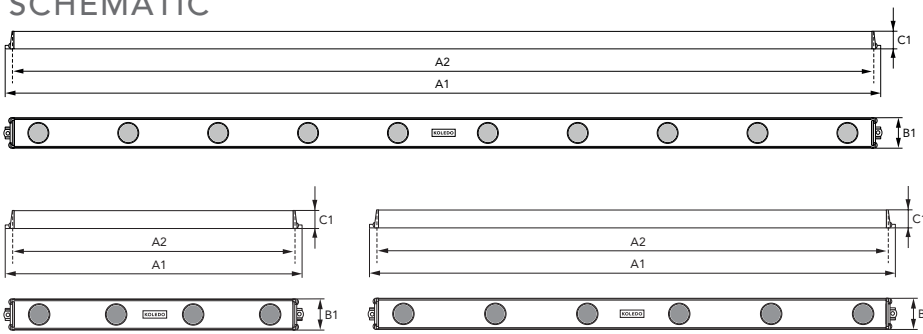

DIMENSIONS (MM)

PRODUCT	A1	A2	B1	C1	# LEDS
	mm	mm	mm		
Privium Posterbox LPM464(i)	371	351	37.5	16	4
Privium Posterbox LPM466(i)	562	542	37.5	16	6
Privium Posterbox LPM460(i)	1038	1028	37.5	16	10

LIGHT DIAGRAM

