


AMBIUM® FLEXLINE-WHT

The solution for all your architectural lighting projects. Ambium Flexline is a flexible and very robust LEDstring without noticing the individual LED nodes. Just one straight line of light. For line lighting it remembers of Neon lighting.




AMBIUM® FLEXLINE-WHT IN/OUTDOOR

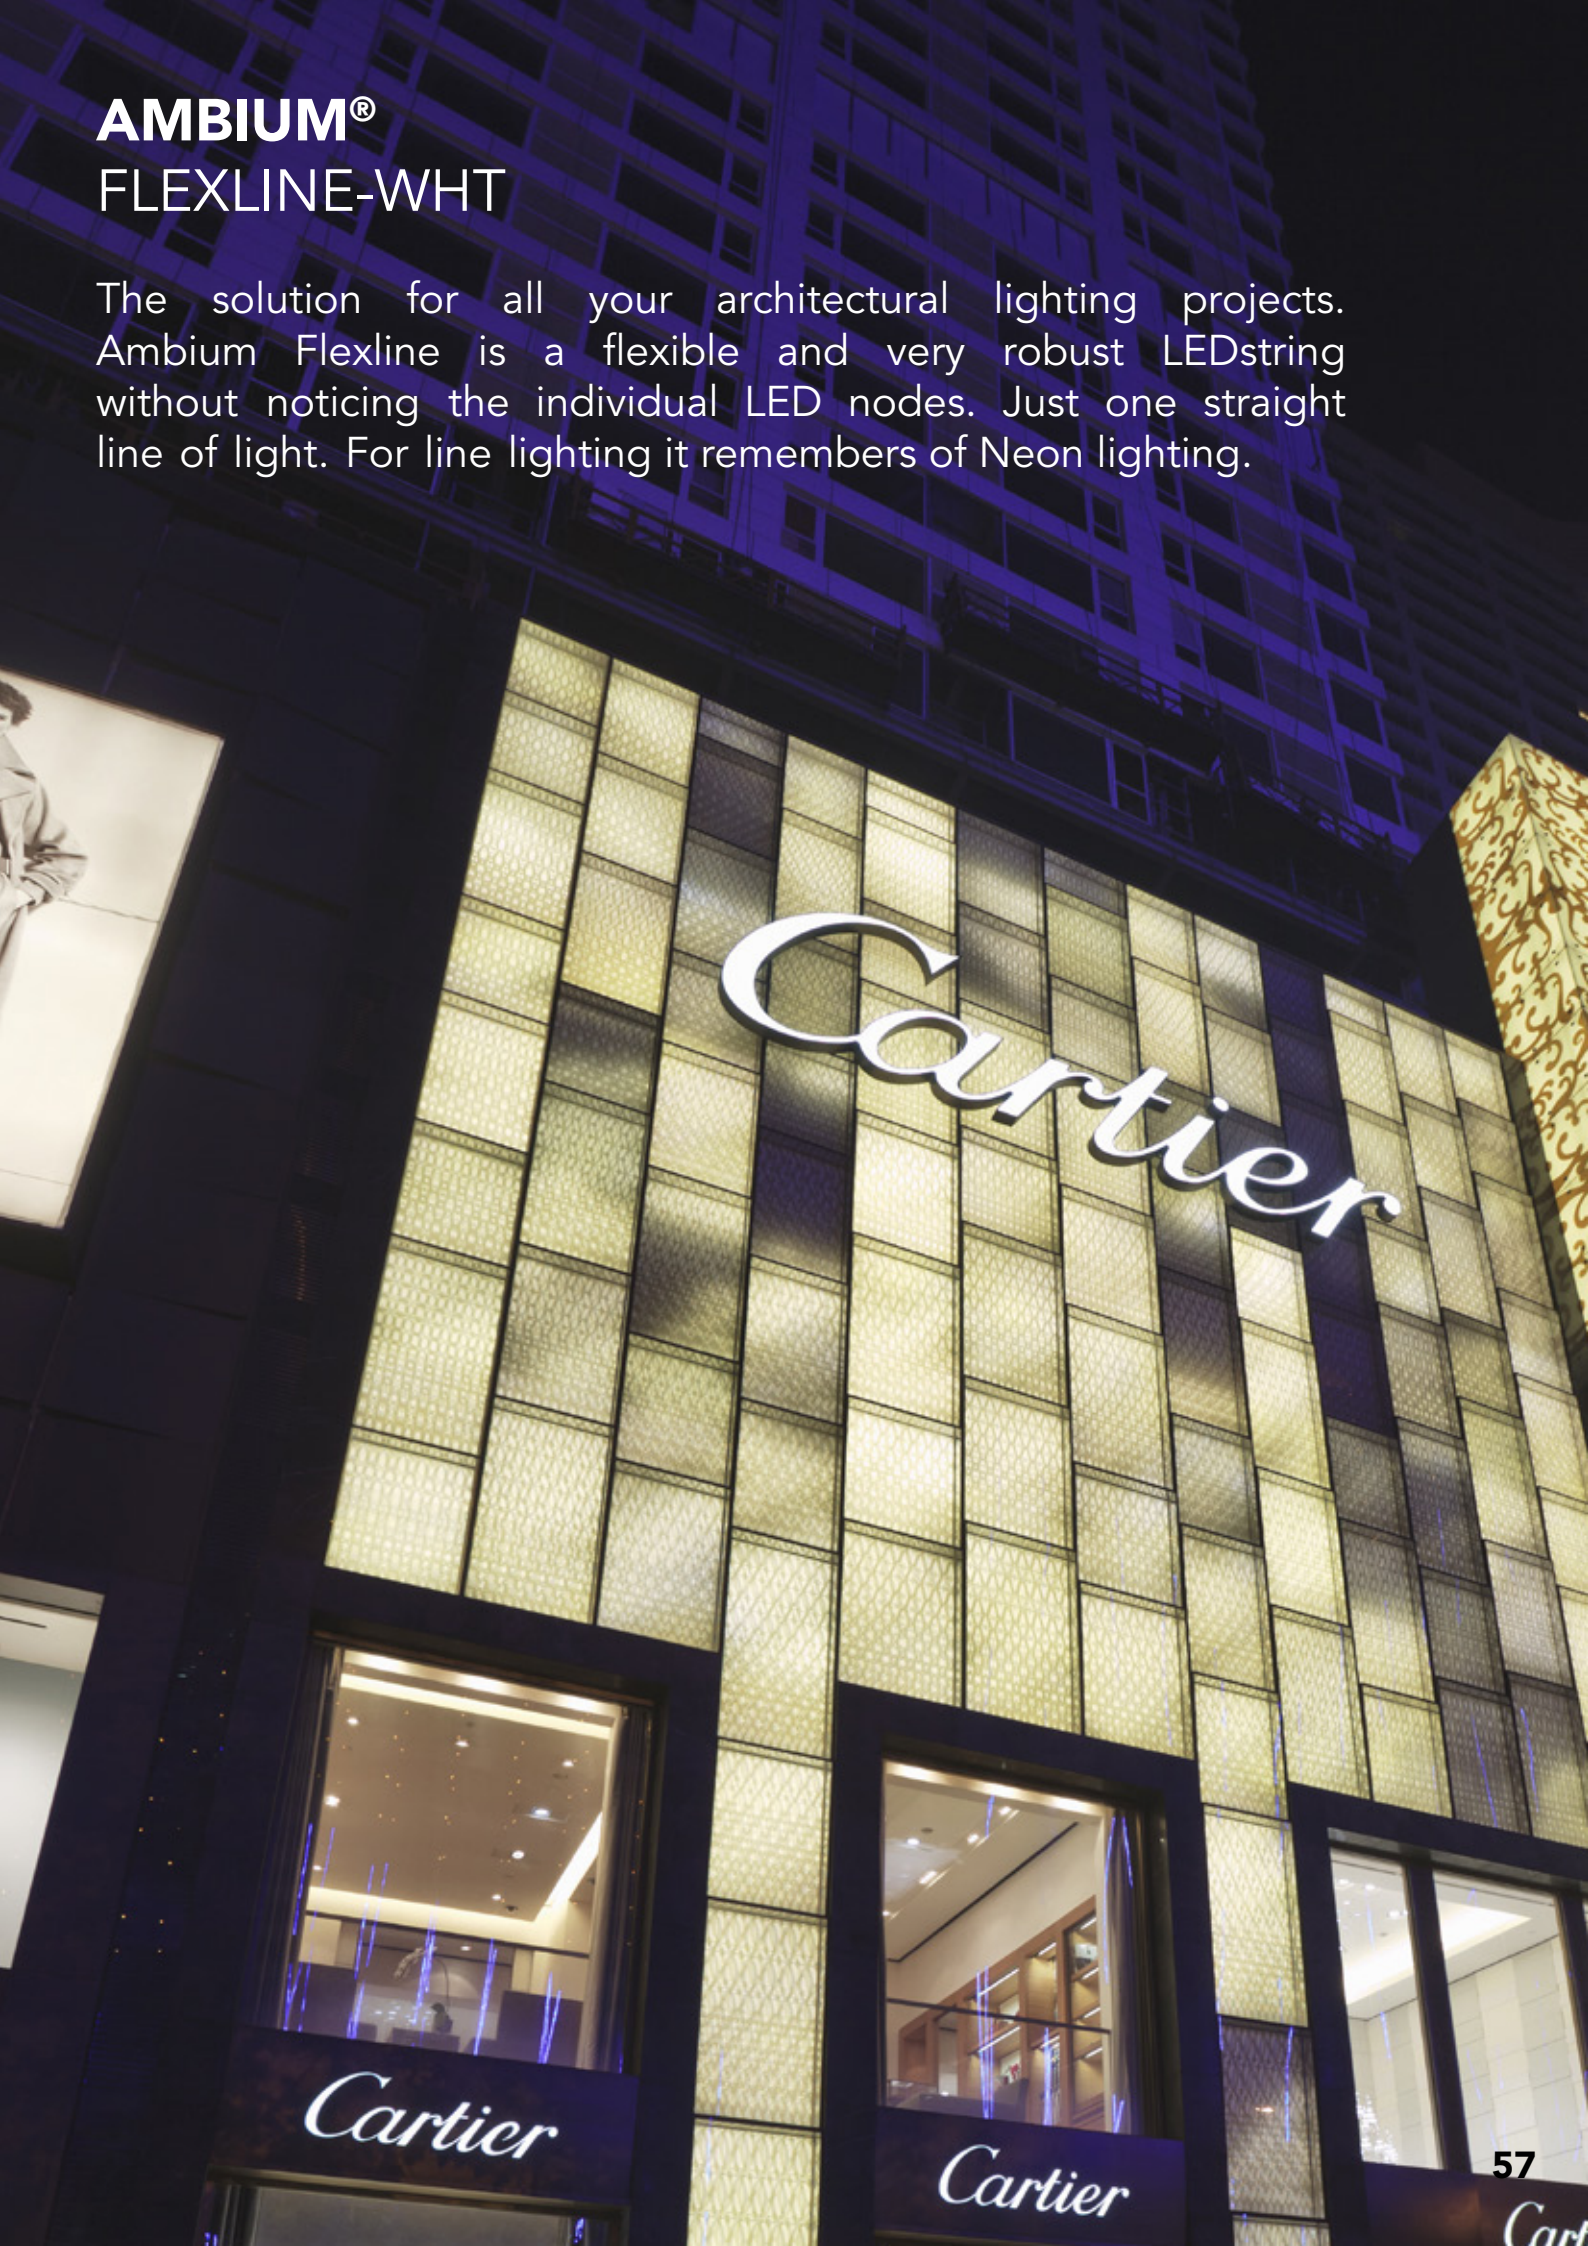

SPECIFICATIONS





ARTICLE NUMBER	PRODUCT	COLOR TEMP	LUMEN OUTPUT	POWER	EFFICIENCY	VOLT-AGE	LEDS / METER	IP RATING	TEMP
		K	Lm/m	W/m	Lm/W	VDC			°C
KFL300021T	Flexline 300-WHT 830K 1000mm Top	3000	785	10	79	24	140	67	-20 to 60
KFL300041T	Flexline 300-WHT 840K 1000mm Top	4000	898	10	90	24	140	67	-20 to 60
KFL300061T	Flexline 300-WHT 865K 1000mm Top	6500	905	10	91	24	140	67	-20 to 60
KFL300025T	Flexline 300-WHT 830K 5000mm Top	3000	785	10	79	24	140	67	-20 to 60
KFL300045T	Flexline 300-WHT 840K 5000mm Top	4000	898	10	90	24	140	67	-20 to 60
KFL300065T	Flexline 300-WHT 865K 5000mm Top	6500	905	10	91	24	140	67	-20 to 60
KFL300021S	Flexline 300-WHT 830K 1000mm Side	3000	630	10	63	24	140	67	-20 to 60
KFL300041S	Flexline 300-WHT 840K 1000mm Side	4000	640	10	64	24	140	67	-20 to 60
KFL300061S	Flexline 300-WHT 865K 1000mm Side	6500	643	10	64	24	140	67	-20 to 60
KFL300025S	Flexline 300-WHT 830K 5000mm Side	3000	630	10	63	24	140	67	-20 to 60
KFL300045S	Flexline 300-WHT 840K 5000mm Side	4000	640	10	64	24	140	67	-20 to 60
KFL300065S	Flexline 300-WHT 865K 5000mm Side	6500	643	10	64	24	140	67	-20 to 60

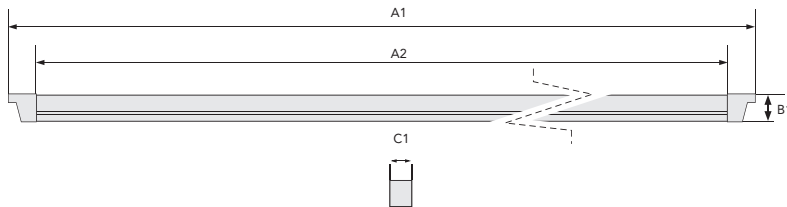

DIMENSIONS (MM)

PRODUCT	A1	A2	B1	C1
	mm	mm	mm	mm
1000 mm version	1030	1004	16	18
5000 mm version	5030	5004	16	18

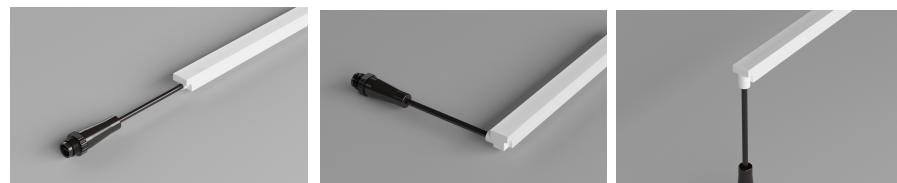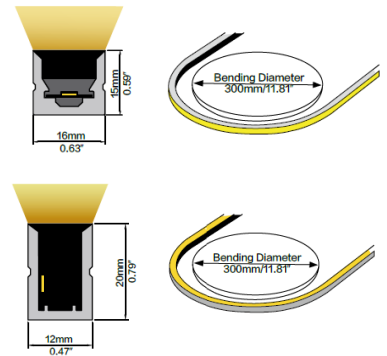

Front Cable Entry

Side Cable Entry

Bottom Cable Entry

LIGHT DIAGRAM

